

Learning Multi-Object Positional Relationships via Emergent Communication

Yicheng Feng*, Boshi An*, Zongqing Lu[†]

School of Computer Science, Peking University
{fyc813@, boshi.an@stu., zongqing.lu@ }pku.edu.cn

Abstract

The study of emergent communication has been dedicated to interactive artificial intelligence. While existing work focuses on communication about single objects or complex image scenes, we argue that communicating relationships between multiple objects is important in more realistic tasks, but understudied. In this paper, we try to fill this gap and focus on emergent communication about positional relationships between two objects. We train agents in the referential game where observations contain two objects, and find that generalization is the major problem when the positional relationship is involved. The key factor affecting the generalization ability of the emergent language is the input variation between Speaker and Listener, which is realized by a random image generator in our work. Further, we find that the learned language can generalize well in a new multi-step MDP task where the positional relationship describes the goal, and performs better than raw-pixel images as well as pre-trained image features, verifying the strong generalization ability of discrete sequences. We also show that language transfer from the referential game performs better in the new task than learning language directly in this task, implying the potential benefits of pre-training in referential games. All in all, our experiments demonstrate the viability and merit of having agents learn to communicate positional relationships between multiple objects through emergent communication.

Introduction

In order to achieve interactive agents, a major problem to be solved is to endow artificial agents with the ability to communicate. Supervised methods are considered incapable of capturing functional meanings of language (Lazaridou, Peysakhovich, and Baroni 2017; Kottur et al. 2017). Therefore, a series of studies on emergent communication probe into this problem by providing agents with simple environments where they learn to communicate with each other from scratch to accomplish specific tasks (Havrylov and Titov 2017; Choi, Lazaridou, and de Freitas 2018; Li and Bowling 2019; Ren et al. 2020). Most of these tasks are based on *referential games* (Lewis 1969), where Speaker observes and describes a target object while Listener receives

the message sent by Speaker and must pick out the target from several candidates.

In existing emergent language studies, agents' observations are mainly focused on a single object, be it a geometric object or a categorical image. Some studies involve images showing more complex scenes, but these studies usually also involve natural language (Das et al. 2017; Gupta, Lanc-tot, and Lazaridou 2021). Communicating the relationships between multiple objects explicitly is understudied. Then, problems may arise when we consider the development from communication in tasks like referential games to communication in tasks with more realistic settings, e.g., multi-step Markov decision process (MDP) tasks, since there the information about multi-object relationships is usually helpful, and sometimes even crucial. So in this paper, we try to fill this gap and address two questions: *Can neural agents learn to extract the information about multi-object relationships and express it through discrete communication channels in the referential game? If so, can the learned protocol help in more complex multi-step MDP tasks?* We focus on positional relationships between two objects in this paper, because it is one of the most common and fundamental relationships, also usually most useful, and it is not too complicated, hence suitable as a starting point.

We train agents in the referential game where the observations are images each containing two geometric shapes, and see whether the agents can communicate the two objects and their positional relationship shown in each image. Since the positional relationship is abstraction information that can have various manifestations in specific images, we propose to use a *random dataset* to test generalization, where each image is generated randomly each time, and the target image observed by Speaker and Listener is also different in pixel level but the same in abstraction. This is a stronger dataset than the standard setup, forcing agents to communicate abstract information to get high accuracy. We also use two common datasets as baselines, the *fixed dataset* where images are fixed and the *variation dataset* where images are randomly generated but the target image observed by Speaker and Listener is exactly the same. We find that agents trained with these two common datasets, though perform well if tested by the corresponding datasets, cannot generalize in the random dataset. This demonstrates that the two commonly used datasets cannot well test agents' ability

*These authors contributed equally.

[†]Corresponding author.

Copyright © 2024, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.

to express abstract information, and also fail to help agents learn multi-object positional relationships. Instead, we find that agents trained with the random dataset can generalize well, implying that the input variation between Speaker and Listener is crucial for learning abstract information in emergent communication, so is necessary for extracting positional relationships. We also use an image encoder pre-trained by a contrastive learning method, SimCLR (Chen et al. 2020), for comparison, and show that the language learned through the referential game with the random dataset generalizes better.

Then we show how communication about multi-object positional relationships helps in multi-step MDP tasks. We design a simple communication game where the positional relationship describes the goal. We find that the emergent language can generalize well in the new task, and is more powerful than raw-pixel images as well as pre-trained image features, proving the good generalization ability of discrete sequences. Besides, we find that language transfer from the referential game could achieve better performance than learning language from scratch in the new task, which may provide evidence for the benefits of language learning in the referential game.

We summarize the main contributions of our work as follows: (1) We explore agents’ communication about multi-object positional relationships in raw-pixel images from scratch through emergent communication. (2) We propose to use the *random dataset* to test the generalization of emergent languages, and find the environmental pressure where Listener observes target images different from Speaker’s crucial for agents to emerge generalizable languages in the referential game. (3) Our experiments show that the emergent language can generalize well in the new multi-step MDP task, and is more powerful than raw-pixel images as well as pre-trained image features.

Related Work

Emergent communication. A series of studies have been done on emergent communication that trains interactive agents to learn protocols from communication games. Most studies focus on language learning in the referential game, where a speaker agent refers to targets using a message and a listener agent tries to understand the message (Lazaridou, Pham, and Baroni 2016; Lazaridou, Peysakhovich, and Baroni 2017; Lazaridou et al. 2018; Havrylov and Titov 2017; Evtimova et al. 2018; Choi, Lazaridou, and de Freitas 2018; Chaabouni et al. 2019, 2020, 2022; Dessì, Kharitonov, and Baroni 2021; Dagan, Hupkes, and Bruni 2021; Gupta, Lanc-tot, and Lazaridou 2021; Denamganaï and Walker 2020b). These studies provide in-depth insights for learned protocols as well as learned representations of agents, but mostly stop at the single task. Chaabouni et al. (2022) proposed *ease and transfer learning* (ETL) to evaluate the generalization of the emergent language to new tasks, but they do not involve multi-step MDP tasks.

Most studies exploring emergent communication in the context of the referential game use inputs containing a single object, *e.g.*, a geometric shape or a natural image depicting a specific object. This restricts the generalization of the

emergent language to complex MDP tasks. We go one step further to explore the positional relationship between two objects in observations.

Some other work explores emergent communication in multi-step MDP tasks directly, where agents learn to use discrete communication channels to cooperate (Bogin, Geva, and Berant 2018; Mordatch and Abbeel 2018; Eccles et al. 2019; Tucker et al. 2021; Lin et al. 2021). These studies usually focus on methods for improving the ability of agents to accomplish the tasks through efficient communication, and explore whether the communication captures critical information for the tasks. However, the protocols are usually still specific to training tasks. We consider the generalization of the emergent language and probe into the language transfer from the referential game to more complex MDP tasks. And we think of the relationship between objects as an entry point.

Input variation between Speaker and Listener in the referential game. Most studies concerning the referential game use the same target input for Speaker and Listener. However, as Bouchacourt and Baroni (2018) mentioned, agents may fail to capture conceptual properties in inputs under this setup. Mihai and Hare (2019) augmented input images to Speaker with noise and random rotations to increase visual semantics of agents. Lazaridou, Peysakhovich, and Baroni (2017) and Choi, Lazaridou, and de Freitas (2018) used a setup where Listener should choose a different image containing the same object as observed by Speaker to encourage the use of abstract information. Sharing the same idea, Dessì, Kharitonov, and Baroni (2021) used the data augmentation pipeline in SimCLR (Chen et al. 2020) to process input images. In our experiments, we find that adding noise alone is not enough for agents to communicate abstract information. We use a random image generator to introduce the environmental pressure more severely so that agents can almost never observe two same images. Moreover, we make a comparison with two other datasets, and find the random image generator really helpful for the communication about positional relationships.

Generalization of agents. There are studies that delve into the influencing factors and testing methods of the generalization abilities of agents (Denamganaï and Walker 2020a; Montero et al. 2021; Chaabouni et al. 2020). Hill et al. (2019) found a rich stimuli is critical for generalization in a 3D environment where agents can recompose known concepts in new combinations. Similarly, Denamganaï, Mis-saoui, and Walker (2022) deeply discussed the richness of stimuli. Hill et al. (2018) shows the effect of an adversarial training regime on generalization. We explore generalization of emergent language across tasks, and propose to introduce pressure with input variation between different agents.

Experimental Setup

The Referential Game

We train our agents in the two-player referential game where Speaker describes a target image to Listener who should pick out the target image among several candidates. Concretely, Speaker observes a target image x , and generates a

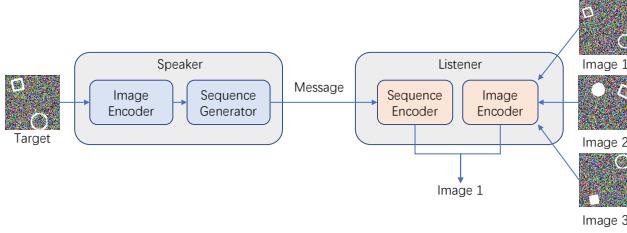


Figure 1: The referential game, agent architecture and examples of images in the random dataset.

message m to describe it. The message m is a sequence of discrete symbols from a vocabulary \mathcal{V} . The message length is T . Listener receives m as well as a set of candidate images \mathcal{C} including the target x and several distractors. Then Listener selects an image $\hat{x} \in \mathcal{C}$ according to m . If $x = \hat{x}$, both agents get a reward $r = 1$. Otherwise, the reward is 0.

Agent Architecture

Speaker, parameterized by θ , consists of an image encoder and a sequence generator. The target image x is fed into a CNN network f_θ to get the image embedding $f_\theta(x)$. Then a projector g_θ maps the embedding into the initial hidden state of an LSTM (Hochreiter and Schmidhuber 1997), $h_{-1} = g_\theta(f_\theta(x))$. Then at each time step t a linear layer π_θ maps h_t into a vector of dimension $|\mathcal{V}|$, and a symbol w_t is sampled from the distribution induced by applying the softmax function to $\pi_\theta(h_t)$. And the one-hot embedding of the generated symbol $e(w_t)$ is fed back to the LSTM l_θ to update the hidden state $h_{t+1} = l_\theta(e(w_t), h_t)$. The first input symbol is a special token labeled as a start of sequence, $h_0 = l_\theta(e(sos), h_{-1})$. The symbols are generated until the message length reaches T . At test time, the symbols are not sampled but selected greedily.

Listener, parameterized by ϕ , consists of an image encoder and a sequence encoder. An LSTM network l_ϕ encodes the sequence $m = w_0, w_1, \dots, w_{T-1}$ from Speaker into the message embedding $e_m = l_\phi(e(m))$, with each symbol in the sequence transformed to a one-hot embedding $e(m) = e(w_0), e(w_1), \dots, e(w_{T-1})$. A CNN network f_ϕ encodes each image $\tilde{x} \in \mathcal{C}$ into image embedding $e_{\tilde{x}} = f_\phi(\tilde{x})$. A linear projector $p_{m,\phi}$ and an MLP projector $p_{\tilde{x},\phi}$ projects the message embedding and each image embedding respectively to compute the cosine similarity between $p_{m,\phi}(e_m)$ and $p_{\tilde{x},\phi}(e_{\tilde{x}})$. The resulting similarities are passed to a softmax function to get a distribution over all images in the candidate set, and the image with the highest probability is selected.

Datasets and the Random Image Generator

We create a dataset where we generate images of size 128×128 each depicting two objects with a certain positional relationship between them. There are 5 different objects and 4 positional relationships (right, top right, top, and top left)¹,

¹Due to the symmetry of the positional relationships, we do not include left, bottom left, bottom, and bottom right.

so there are total 100 ($5 \times 5 \times 4$) combinations. We use the word ‘combination’ to refer to the (object, object, relationship) tuple in the rest of the paper. We separate 20 of 100 combinations into the test set. We additionally add noise to the images for the robustness of the representation learning of image encoders, and to prevent degenerate policies of using pixel-level information. Accordingly, we set the message length $T = 6$, the size of vocabulary $|\mathcal{V}| = 5$, and the number of candidate images $|\mathcal{C}| = 32$ for training and $|\mathcal{C}| = 20$ for test in the referential game, which is illustrated in Figure 1.

In realistic environments, the observation of agents is ever-changing. So we propose to use a random image generator to generate specific images according to the combinations, where the absolute position, size, and orientation of objects vary. In our experiments, we draw white shapes on the black background while adding randomization to the parameters of the size, rotation and position of each object. We hypothesize that using the random generator to provide images for Speaker and Listener separately can better test the generalization, since agents can only succeed when they express and understand the abstract information in the images, especially when the multi-object positional relationship is involved because now images containing the same content are diverse at the pixel level.

To verify this hypothesis, we use other two kinds of datasets for comparison. Then we have three kinds of datasets as follows: (1) **Fixed dataset**. We do not use the random generator but generate one image for each combination, and the absolute position, size, and orientation of objects are fixed. This setup is similar to using structured input in some studies (Li and Bowling 2019; Chaabouni et al. 2020; Ren et al. 2020), since there are no variations of each input in the dataset. Agents trained and tested with the fixed dataset can always observe only one instance of each combination. (2) **Variation dataset**. We use the random generator to generate images, but the target image observed by Speaker and Listener is the same one. This setup is similar to using natural images as inputs as in some studies (Chaabouni et al. 2022; Gupta, Lanctot, and Lazaridou 2021), where different images depicting a same object exist in the dataset. Here agents see diverse images of a combination at training time, but may still use pixel-level information to succeed in the game. (3) **Random dataset**. We use the random generator and generate images for Speaker and Listener separately. Here agents almost never observe two same images and are forced to use abstract information to win the game.

Optimization

We use REINFORCE (Williams 1992) to train Speaker which only uses the reward of the game. We also apply entropy regularization in the loss function to encourage exploration. To train Listener, we use the cross-entropy loss function which compares the output distribution of Listener with a one-hot vector indicating the target image. We use the default Adam optimizer (Kingma and Ba 2015) with a learning rate of 3e-5 to update the parameters.

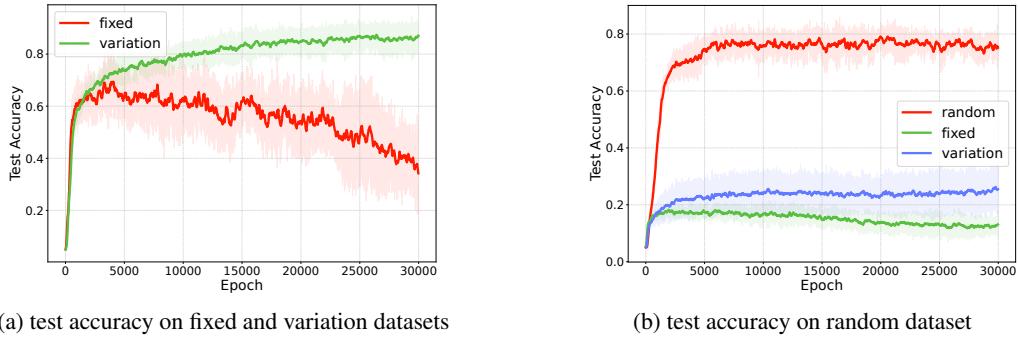


Figure 2: Test accuracy of agents. (a) Agents trained with the fixed dataset or variation dataset are tested using the corresponding test set. (b) Agents trained with three kinds of datasets are tested with the test set of the random dataset.

Evaluation Methods

Generalization in referential games. One of the most important properties of emergent language is the generalization ability to unseen inputs. We measure generalization in the referential game by the test accuracy.

Compositionality. We adopt a popular metric in emergent communication literature called *topographic similarity (TopSim)* (Brighton and Kirby 2006) for measuring language compositionality, which can also reflect generalization ability. It is computed by the Spearman correlation between the distances in the input space and the message space, so high *TopSim* means that similar inputs lead to close messages. According to the characteristics of our setup, we compute the distance in the input space by the number of different attributes in the (object, object, relationship) tuple. We use the Levenshtein distance in the message space.

Visual representations. We explore the quality of the visual representations learned through the referential game. We focus on whether the representations contain features for abstract information, especially the positional relationship. Following (Dessì, Kharitonov, and Baroni 2021), we apply a linear projection head to the learned image encoder, and conduct a classification task trained by supervised learning on the test set. Then we use the classification accuracy to evaluate the learned visual representations.

Ease and transfer learning (ETL). Chaabouni et al. (2022) proposed *ETL* to evaluate the generality of the emergent language to new Listener in new tasks. We measure *ETL* by feeding the deterministic language (*i.e.*, symbols are selected greedily) of Speaker to new Listener in new tasks and report the performances. We use two tasks for *ETL*, image classification and Object Placement. Object Placement aims at our main research goal: whether and how the emergent language can generalize to multi-step MDP tasks.

Experiments and Results

Input Variation in the Random Dataset Is Important for Communication about Multi-Object Positional Relationships

In this section, we analyze the performance of agents in the referential game learning to communicate the multi-object positional relationship from scratch. For all experiments, we

run five times with different random seeds, and report the results in Figure 2. We first use the fixed dataset and the variation dataset respectively for both training and testing. Results in Figure 2a show that agents trained with the variation dataset perform well at test time, so it seems to prove good generalization abilities. And agents trained with the fixed dataset can also get accuracies much higher than a random guess (5%). However, when we use the random dataset for test, agents trained in the previous two datasets cannot generalize as shown in Figure 2b. This implies that testing with the two commonly used datasets does not really reflect the generalization ability of agents. So we argue that input variation between Speaker and Listener is necessary for evaluating generalization in the referential game. Besides, agents trained in these datasets, though random noise is added, fail to communicate human-level conceptual information, at least when the positional relationship is involved.

Then how can agents learn to extract the positional relationship from images when communicating? A natural idea is to train agents with the random dataset, which provides a harsher environment. As mentioned in Lazaridou, Peysakhovich, and Baroni (2017) and Choi, Lazaridou, and de Freitas (2018), the input variation should encourage agents to use the abstract information. We show the results in Figure 2b, and now the agents can perform well in the random dataset, with average accuracy close to 80%. This proves that agents are communicating semantic information so Listener can understand and select the target even if the exact image is different from that observed by Speaker. So we argue that input variation between Speaker and Listener is also necessary for emergent communication about positional relationships, or even other abstract information, in the referential game. We present some examples of the generated sequences by Speaker observing images from the test set in Figure 3. We can observe obvious patterns of different positional relationships in the sequences.

Dessì, Kharitonov, and Baroni (2021) argues that the referential game is similar to the contrastive learning framework in SimCLR (Chen et al. 2020). From this perspective, using the random dataset can be seen as a data augmentation process where the target image is changed but the semantic information is preserved. So we are curious about the performance of the representation learned with SimCLR in-




Figure 3: Examples of generated sequences by Speaker after training with the random dataset. The images are from the test set.

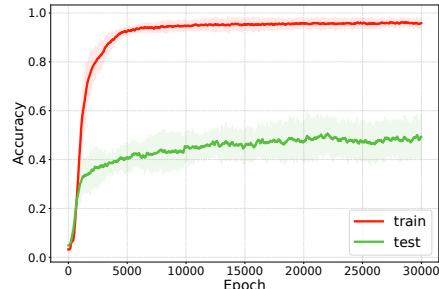


Figure 4: Train and test accuracy of agents whose image encoders are pre-trained by SimCLR with the random dataset.

stead of the referential game from scratch. We train a model using SimCLR, where the positive pairs are images generated by the random generator using the same combination in the training set, and the negative samples are images generated with different semantic concepts. Then we use the frozen SimCLR model as pre-trained image encoders of Speaker and Listener, and train them in the referential game with the random training dataset. Finally, we test the agents using the random test dataset. The result is shown in Figure 4. Surprisingly, using the pre-trained SimCLR model leads to worse performance compared to Figure 2b, *i.e.*, the agents cannot generalize well on the test set, though we find that they get a high accuracy at training time. One reason to explain the result may be that after SimCLR pre-training, the image representations of different images generated by the same combination are very similar, so the effect of using the random dataset in the following referential game is diminished, since the target representations observed by Speaker and Listener is almost the same now. From another perspective, the pre-trained encoders in advance separate different representations for different semantic information in the feature space, so the agents lose the environmental pressure to encode semantic information with emergent languages in the referential game, but can make use of some detailed information in the rich representation to accomplish the task. Then in the test set, though the pre-trained encoders can generate good representations for the new combinations, the agent language cannot generalize well to the new representations. This result shows that using pre-trained image encoders may do bad to generalization in emergent communication.

Analysis of Protocols and Representations Learned through the Referential Game

We report the results for computing *TopSim* for agents trained with different datasets in Figure 5. Obviously, agents

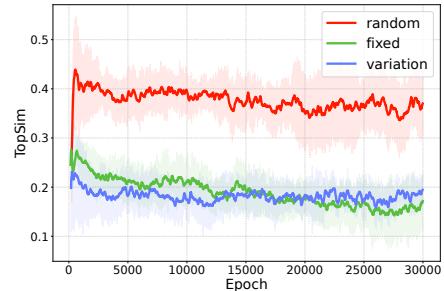


Figure 5: *TopSim* of agents trained with different datasets.

	Fixed	Variation	Random
Representation (%)	84.4 (5.5)	76.2 (8.9)	100.0 (0.0)
ETL (%)	32.8 (8.1)	31.8 (7.2)	90.8 (2.8)

Table 1: We report the mean classification accuracy on our test set with images generated by the random image generator of five different seeds, and one standard error in the brackets. The first row is the evaluation of Speaker’s visual representations trained with different datasets. The second row is the image classification task of *ETL*.

trained with the random dataset get higher *TopSim*, so they tend to use similar messages to describe similar inputs, implying more compositional languages. This again demonstrates the benefit of using the random dataset for training.

Then we evaluate Speaker’s visual representations learned through the referential game. We conduct a classification task to examine whether the visual representations encode conceptual information. We apply a linear classifier to the frozen CNN of Speaker and train it on test set with images generated by the random image generator based on the 20 combinations in the test set. Results in Table 1 demonstrate that agents trained with the random dataset learn better visual representations that capture conceptual information, and perform perfectly in the classification task on the test set. This shows us a promising direction that the referential game can serve as a good representation learning approach that may help encode high-level abstract information in features. On the other hand, the variation dataset does not perform better than the fixed dataset, so the key factor influencing the quality of visual representations is the input variation between Speaker and Listener instead of variations in the dataset. Since representation learning plays an important role in emergent communication, the result tells us that input variation between Speaker and Listener should get attention.

Language Generalization in New Tasks

We adopt *ETL* proposed in Chaabouni et al. (2022), which is considered a more robust metric, to evaluate the ability of the emergent language to generalize to new Listener and new tasks. We first conduct a image classification task as in Chaabouni et al. (2022). Moreover, we want to extend the new tasks to more complex multi-step MDP tasks, which can hardly be achieved if agents can only refer to single objects.

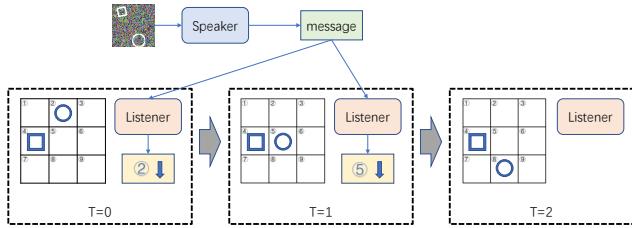


Figure 6: Object Placement task. Speaker observes the target state (image) and describes it to Listener. Listener observes the grid world containing the two objects and receives the message from Speaker. Then it moves the objects to place them to form the correct positional relationship as depicted in the target state.

So we then explore this with a task named Object Placement.

Image Classification For the image classification task, the frozen Speakers encode input images to languages, and we feed the deterministic language of Speaker to new Listener and train a linear classifier on the hidden state of Listener’s sequence encoder on our test set with images generated by the random image generator. The results are shown in Table 1. We can find that *ETL* faithfully reflects the generalization ability of agents, with the random dataset showing the best performance. On the other hand, since *ETL* focuses on the information content conveyed by Speaker, the result implies that agents trained with the random dataset can express the positional relationship well. Note that the combinations are never seen by Speaker in the referential game, and the random image generator provides totally different images of the same content, but new Listener can easily understand the messages and achieve the classification accuracy over 90%, proving that Speaker has already learned to convey the conceptual information in images. Contrarily, agents trained with the fixed dataset and variation dataset cannot learn to communicate such information clearly. So in general, we can conclude that agents can learn to communicate multi-object positional relationships through emergent communication, but necessary environmental pressure should be involved, such as the input variation between Speaker and Listener.

Object Placement Now, according to the analysis above, we have addressed the first question that agents can learn to express positional relationships in the context of the referential game. Then we explore the second one: whether the learned protocol can be helpful in multi-step MDP tasks with the ability to convey information about positional relationships. We design a task named Object Placement, as illustrated in Figure 6. Speaker observes a target image depicting the target positional relationship of two objects. It then sends a message to Listener, who should move the objects in the 3×3 grid to place them in the corresponding positional relationship. The action of Listener is to choose a grid and a direction, and if there is an object in the grid, the object is moved according to the direction by one grid. The observation of Listener is the state of the grid world and

the message sent by Speaker. If Listener places two objects in the correct positional relationship, the reward is +1 and the episode terminates, otherwise, the reward is -0.01 for each step. The maximum episode length is set to 20. The target images are sampled from our training set generated by the random image generator. We use Speaker trained with the random dataset in the referential game, and generate deterministic messages to Listener. Listener uses a newly initialized sequence encoder to process the messages. We train Listener with PPO (Schulman et al. 2017).

We also compare with five baselines:

- The *raw-pixel-input* baseline uses target images to replace the messages sent by Speaker, and Listener learns a CNN model to process the images;
- The *cnn-feature* baseline also uses target images to replace the messages, but Listener uses a frozen CNN model pre-trained on our training set with the random generator by an image classification task;
- The *simclr-feature* baseline uses a pre-trained SimCLR model instead of the pre-trained CNN model compared with the *cnn-feature* baseline;
- The *rl-scratch* baseline trains Speaker from scratch using REINFORCE to send messages. For this method, we train Speaker and Listener alternately;
- The *state* baseline gives the true target relation to Listener directly, showing the optimal performance.

Figure 7 shows the learning curves of all the methods in the Object Placement task: the episode reward in Figure 7a, and the episode length of agents accomplishing the task in Figure 7b. Except the *rl-scratch* and *raw-pixel-input* baselines, all other methods converge to the same performance but differ in learning speed.

Firstly, from the *ETL*’s perspective, our Speaker’s language can generalize pretty well in the new multi-step task, so new Listener can understand the message and learn a good policy in the new task quickly, close to the *state* baseline (the upper bound) that tells Listener the true target relationship. This demonstrates the generalization ability of the emergent language in the referential game, and shows that the agent has learned a general communication skill instead of a protocol overfitting to a single task. And this addresses our second question that emergent language in the referential game can be helpful in multi-step MDP tasks. Previous studies where agents learn to refer to single objects hardly explore the language transfer to multi-step tasks, probably because the object-level information is usually not sufficient for accomplishing these tasks. Our research on the learning of positional relationships can be seen as a step to break the restriction and towards the application of emergent communication in more complex tasks.

Besides, the *raw-pixel-input* baseline fails to learn a policy to accomplish the task. This result proves that agents trained with deep reinforcement learning may feel difficult to capture the abstract information from raw-pixel images directly, so the Listener seems confused with this input. Therefore, state representations become important for reinforcement learning agents when the environment requires abilities for conceptual abstraction.

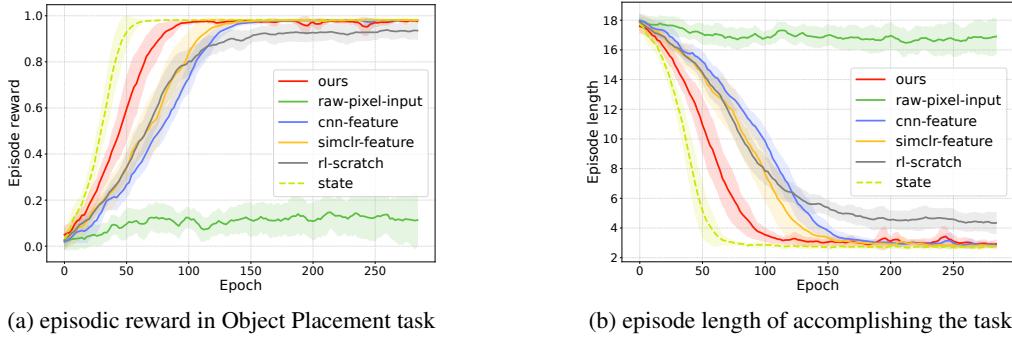


Figure 7: Performance of new Listener trained with different inputs of the target state in the Object Placement task. All experiments are run for 5 seeds, and the shaded part of the curves is one standard error.

Then which kind of representation is better? In Figure 7 we can find that, though the *cnn-feature* baseline and the *simclr-feature* baseline achieve comparable performance with our method using the learned Speaker, Listener learns faster if the input is discrete symbols. This is to some extent in line with the point of view in Garnelo, Arulkumaran, and Shanahan (2016) that conceptual abstraction provided by symbolic representations promotes data efficient learning. So it comes to the significance of research on language learning about conceptual information that is useful in various MDP tasks, such as positional relationships, spatial relationships, or numeric concepts (Guo et al. 2019).

From the result of the *rl-scratch* baseline, directly training Speaker and Listener in the Object Placement task gets poorer performance than using pre-trained emergent language. This may provide evidence that the referential game is more suitable for a starting point for language learning, since it is easier for compositional and generalizable languages to emerge. It is reasonable because in the referential game Speaker receives the feedback more effectively.

Discussion

The goal of emergent communication should be making neural agents acquire general communication skills instead of merely the ability to solve specific communication games. Many studies have been dedicated to the research on learning compositional languages in the context of referential games, but few have probed into the generalization of the emergent language to more complex tasks such as multi-step MDP tasks. We wonder about the viability of this development, while we argue referential games restricted to referring to single objects limit such development. So we go one step forward to explore communication about positional relationships, which may be an entry point of emergent communication about more high-level conceptual information.

We first find that agents can learn to communicate positional relationships well through training with the referential game, but the key factor that influences the ability is the input variation between Speaker and Listener. So we may need stronger environmental pressure when more conceptual information is involved. We also show that we need stronger datasets to test the true generalization ability of emergent

languages.

Then we use a simple environment to evaluate the performance of language transfer from the referential game to a multi-step MDP task. We find that the emergent language, which can convey information about positional relationships, not only generalizes well in the new task, but also overperforms pre-trained image features and language learned directly in the specific task. So it verifies the viability of language transfer from referential games to more complex tasks, and shows a promising path to employ emergent communication for conceptual abstraction in complex environments and games.

It is worth noting that we focus on learning positional relationships in the referential game in this paper, and we have carried out preliminary experiments of language transfer from the referential games to complex MDP tasks. The limitations in this work should be addressed in future: whether, or how, the learned positional relationships can generalize well to out-of-distribution datasets? Then the acquired communication skills can be applied to more diverse tasks. Besides, the Object Placement task in our work is somewhat simple, and we should explore language transfer to more general MDP tasks in future work. Furthermore, positional relationship is not enough for general tasks, whether other conceptual information can be learned through emergent communication? In addition to serving as a function similar to state representation, grounding the emergent language into actions in MDP tasks is also a future direction. Finally, our use of a random generator for input variation may not be applicable in some scenarios. While other generative models can be used, different ways for input variation may be explored such as using different views of a same scene. Our work may be seen as one of the openings for research on task scaling up for more general agent language learning through emergent communication.

Acknowledgements

This work was supported by NSF China under grant 62250068. The authors would like to thank the anonymous reviewers for their valuable comments.

References

Bogin, B.; Geva, M.; and Berant, J. 2018. Emergence of communication in an interactive world with consistent speakers. *arXiv preprint arXiv:1809.00549*.

Bouchacourt, D.; and Baroni, M. 2018. How agents see things: On visual representations in an emergent language game. In *EMNLP*.

Brighton, H.; and Kirby, S. 2006. Understanding Linguistic Evolution by Visualizing the Emergence of Topographic Mappings. *Artif. Life*.

Chaabouni, R.; Kharitonov, E.; Bouchacourt, D.; Dupoux, E.; and Baroni, M. 2020. Compositionality and Generalization In Emergent Languages. In *ACL*.

Chaabouni, R.; Kharitonov, E.; Dupoux, E.; and Baroni, M. 2019. Anti-efficient encoding in emergent communication. In *NeurIPS*.

Chaabouni, R.; Strub, F.; Alché, F.; Tarassov, E.; Tallec, C.; Davoodi, E.; Mathewson, K. W.; Tielemans, O.; Lazaridou, A.; and Piot, B. 2022. Emergent Communication at Scale. In *ICLR*.

Chen, T.; Kornblith, S.; Norouzi, M.; and Hinton, G. E. 2020. A Simple Framework for Contrastive Learning of Visual Representations. In *ICML*.

Choi, E.; Lazaridou, A.; and de Freitas, N. 2018. Compositional Obverter Communication Learning from Raw Visual Input. In *ICLR*.

Dagan, G.; Hupkes, D.; and Bruni, E. 2021. Co-evolution of language and agents in referential games. In *EACL*.

Das, A.; Kottur, S.; Moura, J. M. F.; Lee, S.; and Batra, D. 2017. Learning Cooperative Visual Dialog Agents with Deep Reinforcement Learning. In *ICCV*.

Denamganaï, K.; Missaoui, S.; and Walker, J. A. 2022. Meta-Referential Games to Learn Compositional Learning Behaviours. *arXiv preprint arXiv:2207.08012*.

Denamganaï, K.; and Walker, J. A. 2020a. On (Emergent) Systematic Generalisation and Compositionality in Visual Referential Games with Straight-Through Gumbel-Softmax Estimator. *arXiv preprint arXiv:2012.10776*.

Denamganaï, K.; and Walker, J. A. 2020b. ReferentialGym: A Nomenclature and Framework for Language Emergence & Grounding in (Visual) Referential Games. *arXiv preprint arXiv:2012.09486*.

Dessì, R.; Kharitonov, E.; and Baroni, M. 2021. Interpretable agent communication from scratch (with a generic visual processor emerging on the side). In *NeurIPS*.

Eccles, T.; Bachrach, Y.; Lever, G.; Lazaridou, A.; and Graepel, T. 2019. Biases for Emergent Communication in Multi-agent Reinforcement Learning. In *NeurIPS*.

Evtimova, K.; Drozdov, A.; Kiela, D.; and Cho, K. 2018. Emergent Communication in a Multi-Modal, Multi-Step Referential Game. In *ICLR*.

Garnelo, M.; Arulkumaran, K.; and Shanahan, M. 2016. Towards deep symbolic reinforcement learning. *arXiv preprint arXiv:1609.05518*.

Guo, S.; Ren, Y.; Havrylov, S.; Frank, S.; Titov, I.; and Smith, K. 2019. The emergence of compositional languages for numeric concepts through iterated learning in neural agents. *arXiv preprint arXiv:1910.05291*.

Gupta, A.; Lanctot, M.; and Lazaridou, A. 2021. Dynamic population-based meta-learning for multi-agent communication with natural language. In *NeurIPS*.

Havrylov, S.; and Titov, I. 2017. Emergence of language with multi-agent games: Learning to communicate with sequences of symbols. In *NeurIPS*.

Hill, F.; Lampinen, A.; Schneider, R.; Clark, S.; Botvinick, M.; McClelland, J. L.; and Santoro, A. 2019. Environmental drivers of systematicity and generalization in a situated agent. In *ICLR*.

Hill, F.; Santoro, A.; Barrett, D.; Morcos, A.; and Lillicrap, T. 2018. Learning to Make Analogies by Contrasting Abstract Relational Structure. In *ICLR*.

Hochreiter, S.; and Schmidhuber, J. 1997. Long Short-Term Memory. *Neural Comput.*

Kingma, D. P.; and Ba, J. 2015. Adam: A Method for Stochastic Optimization. In *ICLR*.

Kottur, S.; Moura, J.; Lee, S.; and Batra, D. 2017. Natural Language Does Not Emerge ‘Naturally’ in Multi-Agent Dialog. In *EMNLP*.

Lazaridou, A.; Hermann, K. M.; Tuyls, K.; and Clark, S. 2018. Emergence of Linguistic Communication from Referential Games with Symbolic and Pixel Input. In *ICLR*.

Lazaridou, A.; Peysakhovich, A.; and Baroni, M. 2017. Multi-Agent Cooperation and the Emergence of (Natural) Language. In *ICLR*.

Lazaridou, A.; Pham, N. T.; and Baroni, M. 2016. Towards multi-agent communication-based language learning. *arXiv preprint arXiv:1605.07133*.

Lewis, D. K. 1969. *Convention: A Philosophical Study*. Wiley-Blackwell.

Li, F.; and Bowling, M. 2019. Ease-of-Teaching and Language Structure from Emergent Communication. In *NeurIPS*.

Lin, T.; Huh, J.; Stauffer, C.; Lim, S.; and Isola, P. 2021. Learning to Ground Multi-Agent Communication with Autoencoders. In *NeurIPS*.

Mihai, D.; and Hare, J. 2019. Avoiding hashing and encouraging visual semantics in referential emergent language games. *arXiv preprint arXiv:1911.05546*.

Montero, M. L.; Ludwig, C. J. H.; Costa, R. P.; Malhotra, G.; and Bowers, J. S. 2021. The role of Disentanglement in Generalisation. In *ICLR*.

Mordatch, I.; and Abbeel, P. 2018. Emergence of grounded compositional language in multi-agent populations. In *AAAI*.

Ren, Y.; Guo, S.; Labeau, M.; Cohen, S. B.; and Kirby, S. 2020. Compositional languages emerge in a neural iterated learning model. In *ICLR*.

Schulman, J.; Wolski, F.; Dhariwal, P.; Radford, A.; and Klimov, O. 2017. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*.

Tucker, M.; Li, H.; Agrawal, S.; Hughes, D.; Sycara, K. P.; Lewis, M.; and Shah, J. A. 2021. Emergent Discrete Communication in Semantic Spaces. In *NeurIPS*.

Williams, R. J. 1992. Simple statistical gradient-following algorithms for connectionist reinforcement learning. *Machine learning*.